


PUMA 191



FEATURES

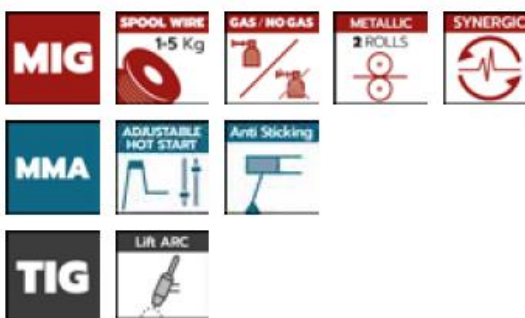

TECHNICAL DATA

Input Voltage	
Power 60%	

U ₀	
Amp. min-max	
Duty Cycle 40°C	
Steel	0,9 Ø mm
Stainless steel	0,6 + 0,8 Ø mm
Aluminium	0,8 + 1,0 Ø mm
Flux Core	0,8 Ø mm
CuSi ₂	0,8 Ø mm
Ø Electrode	-
Electrode type	-
Insulation	H
Protection degree	IP22S
Dimens. (LxWxH)	460x770x660 mm
Box (LxWxH)	360x795x530 mm
Weight box/net	37 / 33 Kg

PUMA 191

(1ph) 230V ± 10% · 50/60Hz
2,3 KVA

	MIG	MMA	TIG
70 V	70 V	70 V	70 V
25 + 180 A	20 + 180 A	5 + 180 A	
180A @ 20%	180A @ 20%	180A @ 20%	180A @ 20%
105A @ 60%	105A @ 60%	105A @ 60%	105A @ 60%
75A @ 100%	75A @ 100%	75A @ 100%	75A @ 100%
0,9 Ø mm	-	-	-
0,6 + 0,8 Ø mm	-	-	-
0,8 + 1,0 Ø mm	-	-	-
0,8 Ø mm	-	-	-
0,8 Ø mm	-	-	-
-	1,6 + 3,25 Ø mm	-	-
-	6013 - 7018 - CrNi	-	-
	H		
	IP22S		
	460x770x660 mm		
	360x795x530 mm		
	37 / 33 Kg		

GmbH

Service – Reparatur – Verkauf

Zentrale Herzogenburg: +43 (0) 2782 / 93 193

Filiale Wien: +43 (0) 1 / 292 427 2

Technik / Vertrieb: +43 699 / 130 330 00

office@schweissfuzzy.at

- Mo: 08:00-17:00
- Di: 08:00-17:00
- Mi: 08:00-17:00
- Do: 08:00-17:00
- Fr: 08:00-13:30

www.schweissfuzzy.at